



BERTONY

 Engineered in Italy





BERTONY



B ZERO 1



B ZERO 2



B ZERO 3



B ZERO 4



B ZERO 5



B ZERO 6



B ZERO 7



B ZERO 8



B ZERO 9



BERTONY



B ZERO 10



B ZERO 11



B ZERO 12



B ZERO 13



B ZERO 14



B ZERO 15



B ZERO 16



B ZERO 17



B ZERO 19



BERTONY



B ZERO 20



B ZERO 21



B ZERO 22



B ZERO 25



B ZERO 26



B ZERO 27



B ZERO 81



B ZERO 82



B ZERO 83



BERTONY



B ZERO 84



B ZERO 85



B ZERO 86



B ZERO 87



B ZERO 89



B ZERO 94



B ZERO 95



B ZERO 97



B ZERO 90



BERTONY



B ZERO 96



B ZERO 101



B ZERO 102



B ZERO 121



B ZERO 122



B ZERO 123PRO



B ZERO 141



BZERO 151



B ZERO 152




BZERO 171








A LEGACY WITH

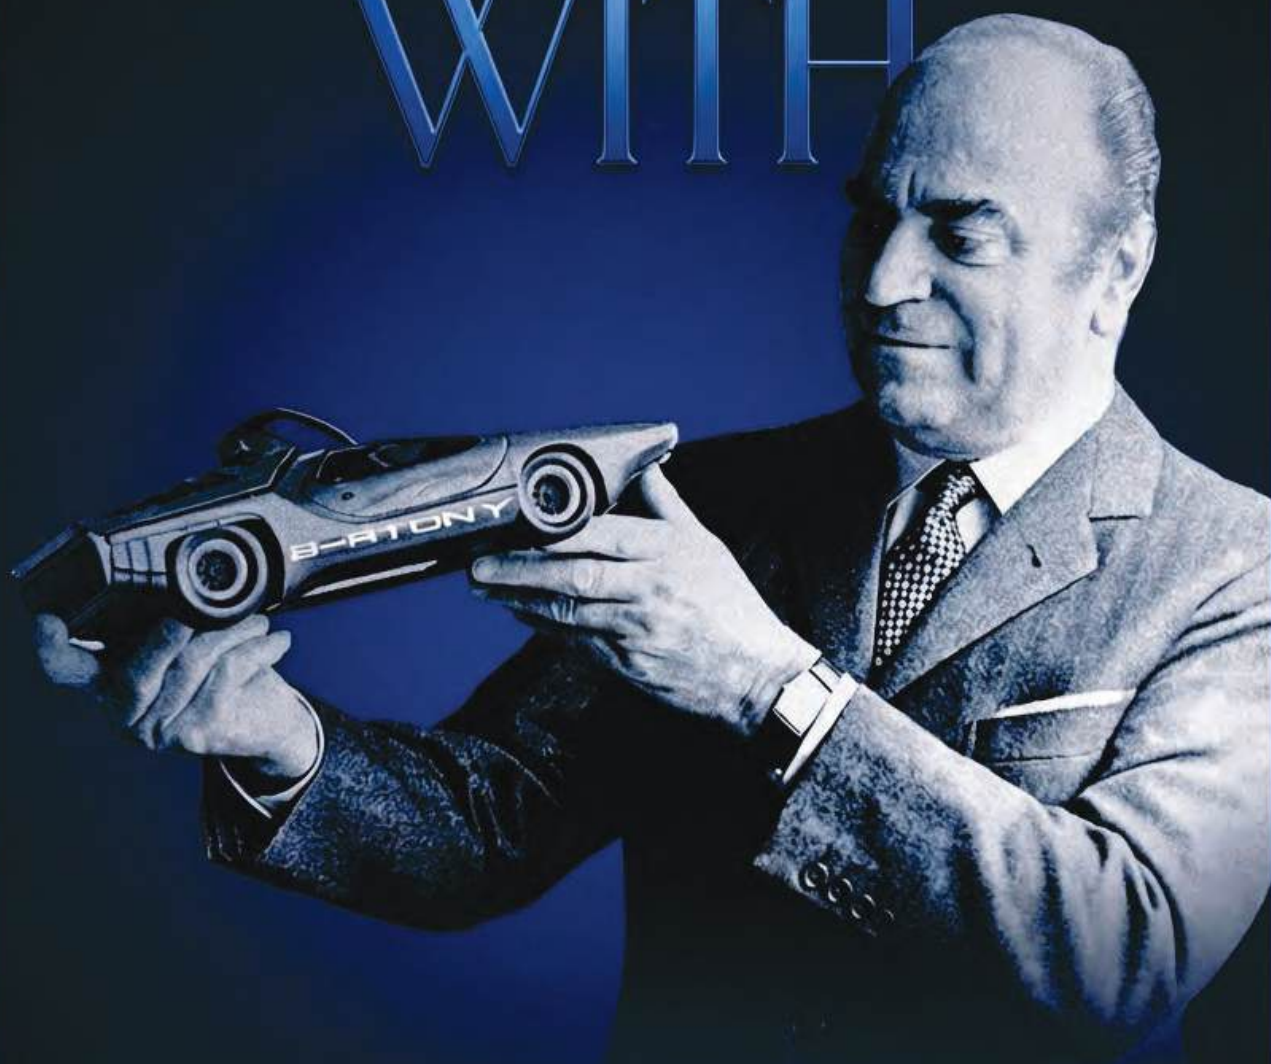

INNOVATION SINCE 1912

Product features

Widened shoulder tread design increases contacting area, providing better driving stability and reliability. Continuous straight center rib design provides optimized ground contact area, guarantees better driving safety. Excellent grip and handling performance on wet land.



B ZERO 15



Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
165/65R13	77T	6.5	5J	544	170	412	250
175/60R13	77T	6.5	5J	540	177	475	250
175/70R13	82T	6.9	5J	576	177	475	250
185/60R13 WSW	80H	6.9	5½J	552	189	450	250
185/70R13	86T	-	5.5J	590	189	530	250
175/65R14	82 H	6.5	5	584	177	475	250
175/70R14	84H	6.9	5J	602	177	500	250
185/60R14	82H	-	5.5J	578	189	475	250
185/65R14	86H	-	5.5J	596	189	530	250
185/70R14	88 T	6.5	5.5	616	189	560	250
195/60R14	86H	-	6.0J	590	201	530	250
195/70R14	91 H	6.8	6	630	201	615	250
205/60R14	88V	6.8	6J	602	209	560	280
185/65R15	88 H	6.5	5.5J	621	189	560	250
195/60R15	88H	-	6J	615	201	560	250
195/65R15	91 V	6.8	6J	635	201	615	280
205/60R15	91V	6.8	6J	627	209	615	280
205/65R15	94 V	6.8	6J	647	209	670	280
205/70R15	96 T	6.8	6	669	209	710	250
225/70R15 WSW	100H	6.9	6½J	697	228	800	250
205/55R16	91V	6.9	6.5J	632	214	615	250
205/65R16	95H	6.9	6J	672	209	690	250
215/60R16	95 H	6.8	6.5J	664	221	690	250
215/65R16	98H	7.2	6½J	686	221	750	300
215/55R17	98W XL	6.9	7J	668	226	750	290



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL

SAND

IT

FR

DE

UK

ES

PT

GR

TR

RU



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL

SAND

8

8


8



Product features :

Criss-cross grooves design enhance water evacuation, effectively prevent tire lateral slip on wet road.

Central rib combined with horizontal grooves provides nice stability, excellent acceleration and brake performance at high speed.



B ZERO 17



Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
195/50R15	82V			577		475	300
195/55R15	85V			595		515	300
185/55R16	83H			610		487	300
195/50R16	84H			602		500	300
195/55R16	87H			620		454	300
215/65R16	98H	7.7	6.5	686	221	750	
215/70R16	100H	7.9	6.5	708	221	800	
225/60R16	102H			676		850	340





Product features :

The four wide longitudinal drainage grooves provide excellent wetland performance of the tire, which effectively prevent the side sliding.

The coupling design with the crosswise arc grooves and fine arc slots effectively damaged the water film in the wet road, which provide better grasp force in the wetland.

The 3D slots design increased the braking and grounding area to provide bigger traction force. Meantime it effectively increased the heat radiation area and improved the endurance performance of the tire.

The green environment protection material with silicon material optimized the profile of tire tread with better oil consumption, it more quiet and comfort.

B ZERO 101

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
165/65R13	77	T	5-00B	170	544	412	300
175/60R13	77	H	5-00B	177	540	412	300
175/70R13	82	T	5 00B	177	576	475	300
175/75R13	85	T	5.00B	177	592	515	300
175/65R14	82	H	5J	177	584	475	300
175/70R14	88 XL	T	5J	177	602	560	340
175/75R14	86	T	5J	177	618	530	300
185/65R14	86	H	5 1/2J	189	596	530	300
185/70R14	88	H	5 1/2J	189	616	560	300
195/70R14	91	H	6J	201	630	615	300
175/65R15	84	H	5J	177	609	500	300
185/60R15	88 XL	H	5 1/2J	189	603	560	340
185/65R15	88	H	5 1/2J	189	621	560	300
195/50R15	82	V	6J	201	577	475	300
195/55R15	85	V	6J	201	595	515	300
195/60R15	88	V	6J	201	615	560	300
195/65R15	91	V	6J	201	635	615	300
205/65R15	94	H	6J	209	647	670	300
195/50R16	84	V	6J	201	602	500	300
195/55R16	87	V	6J	201	620	545	300
205/55R16	91	V	6 1/2J	214	632	615	300
205/60R16	92	V	6J	209	652	630	300
215/55ZR16	97 XL	W	7J	226	642	730	340
215/60R16	95	H	6 1/2J	221	664	690	300
205/45ZR17	88 XL	W	7J	206	616	560	340



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL

SAND

IT

FR

DE

UK

USA

JP

IN

BR

B ZERO 101

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
205/50ZR17	93 XL	W	6 1/2J	214	638	650	340
205/55R17	91	V	6 1/2J	214	658	615	300
215/45ZR17	91 XL	W	7J	213	626	615	340
215/50ZR17	95 XL	W	7J	226	648	690	340
215/55ZR17	98 XL	W	7J	226	668	750	340
225/45ZR17	94 XL	W	7 1/2J	225	634	670	340
225/50ZR17	98 XL	W	7J	233	658	750	340
225/55R17	97	V	7J	233	680	730	300
225/40ZR18	92 XL	W	8J	230	637	630	340
225/45ZR18	95 XL	W	7 1/2J	225	659	690	340
245/45ZR18	100 XL	W	8J	243	677	800	340
245/40ZR19	98 XL	W	8 1/2J	248	679	750	340





Product features:

The four wide longitudinal drainage grooves provide excellent wetland performance of the tire.

The strong design of the shoulder resisted the irregular wearing of the tire.

The coupling design of longitudinal and crosswise arc grooves effectively damaged the water film on the wet road, which provide better grasp force on the wet road.

The green environment protection material with silicon material optimized the profile of tire tread with better oil consumption, it more quiet and comfort.

B ZERO 102

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
185/70R13	86	T	5.50B	189	590	530	300
175/70R14	88 XL	T	5J	177	602	560	340
185/60R15	88 XL	H	5 1/2J	189	603	560	340
185/65R15	88	H	5 1/2J	189	621	560	300
195/65R15	91	V	6J	201	635	615	300
205/55R16	91	V	6 1/2J	214	632	615	300
205/60R16	92	V	6J	209	652	630	300
215/60R16	95	H	6 1/2J	221	664	690	300
205/50ZR17	93 XL	W	6 1/2J	214	638	650	340
215/50ZR17	95 XL	W	7J	226	648	690	340
215/55ZR17	98 XL	W	7J	226	668	750	340
225/50ZR17	98 XL	W	7J	233	658	750	340
225/65R17	102	H	6 1/2J	228	724	850	300
235/55R17	103 XL	V	7 1/2J	245	690	875	340
235/65R17	104	H	7J	240	738	900	300
265/65R17	112	T	8J	272	776	1120	300
265/70R17	115	T	8J	272	804	1215	300
225/40ZR18	92 XL	W	8J	230	637	630	340
225/45ZR18	95 XL	W	7 1/2J	225	659	690	340
235/55R18	104 XL	V	7 1/2J	245	715	900	340
235/60R18	103	V	7J	240	739	875	300
245/45ZR18	100 XL	W	8J	243	677	800	340
235/55R19	101	V	7 1/2J	245	741	825	300
245/45ZR19	102 XL	W	8J	243	703	850	340
245/45ZR20	103 XL	W	8J	243	728	875	340
285/50ZR20	116 XL	W	9J	297	794	1250	340



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL

SAND

IT

11

BERTONY


ITALIAN
DESIGN.
SUPERIOR
PERFORMANCE.



UHP

Product features :

Asymmetric pattern design provides excellent grip on curves, ensuring stability during driving and offering excellent water drainage performance.
Optimized pitch width and arrangement and pitch displacement design effectively reduce noise during driving.



B ZERO 14



Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
215/55ZR16	97WXL	-	7	626	-	730	-
225/55ZR16	99WXL	-	7	648	-	775	-
215/50R17	91V	10	7J	648	226	615	283
215/55ZR17	98W XL	10	7J	668	226	750	336
225/45ZR17	94WXL	-	7.5	626	-	670	-
225/50ZR17	98W XL	10	7J	658	233	750	338
225/55ZR17	101W XL	10	7J	680	233	825	336
235/45ZR17	97WXL	-	8	635	-	730	-
235/55R17	99V	10	7.5J	690	245	775	281
245/45ZR17	95W/99WXL	-	8	643	-	775	-
225/40ZR18	88W/92WXL	-	8	632	-	630	-
225/45ZR18	95W XL	10	7.5J	659	225	690	336
225/50ZR18	95W	-	7	674.4	-	630	-
245/40ZR18	97WXL	-	8.5	646	-	730	-
245/45ZR18	100W XL	10	8J	667	243	800	336
245/50ZR18	104WXL	-	7.5	694	-	900	-
255/55R18	109VXL	-	7	697	-	850	-
235/50ZR19	103WXL	-	7.5	710	-	875	-
245/45ZR19	98W	10	8J	703	243	750	302
255/45ZR19	104W XL	10	8J	713	255	900	338
255/50ZR19	107WXL	-	8	731	-	975	-
255/55R19	111VXL	-	8	755	-	1090	-
245/45ZR20	103W XL	10	8J	728	243	875	336
255/50R20	109VXL	-	8	756	-	1030	-
275/45R20	110VXL	-	9	748	-	1060	-



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL

SAND

IT

FR

DE

ES

GB


JP

US



Product features :

Smooth asymmetric pattern, ensuring better controlling performance of outside while enhancing drainage of inside. Four wide deep grooves keep excellent wetting performance and handling stability. Outside shoulder reinforcement improving handling performance at curve, effectively preventing abnormal wear. Bended steel groove, effectively reducing the noise while enlarging ground contact area.



B ZERO 16



Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
225/60R17	103V	7.9	6.5	702	228	875	
225/45ZR19	96W XL			685		710	340
225/55ZR19	99W			731		775	300
245/45R20	103W	7.9	8	728	243	875	
245/50ZR20							



Product features :

Outside strong blocks design enables the tyre to follow the road's surface contours more closely, helps to reduce block deformation while speed cornering, and enhances steering precision & better grip.

Inside wide ribs grooves ensures effective water dispersion.

Sequential blocks design improves tread rib hardness, enhances braking performance.

Wide ribs grooves effectively removes water, provides shorter braking distances and safer handling on wet roads.

Racing compound technology provides superior grip performance on wet road surfaces.



B ZERO 121

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
205/45ZR16	87XL	W	7J	206	590	545	340
225/50R16	96XL	V	7J	233	632	710	340
205/50ZR17	93XL	W	6 1/2J	214	638	650	340
215/40ZR17	87XL	W	7 1/2J	218	604	545	340
215/45ZR17	91XL	W	7J	213	626	615	340
215/50ZR17	95XL	W	7J	226	648	690	340
225/45ZR17	94XL	W	7 1/2J	225	634	670	350
225/50ZR17	98XL	W	7J	233	658	750	340
235/55R17	103XL	V	7 1/2J	245	690	875	340
235/45ZR17	97XL	W	8J	236	644	730	340
235/50R17	100XL	V	7 1/2J	245	668	800	340
245/45ZR17	99XL	W	8J	243	652	775	340
215/40ZR18	89XL	W	7 1/2J	218	629	580	340
215/45ZR18	93XL	W	7J	213	651	650	340
215/55R18	99XL	V	7J	226	693	775	340
225/40ZR18	92XL	W	8J	230	637	630	350
225/45ZR18	95XL	W	7 1/2J	225	659	690	350
225/50R18	99XL	V	7J	233	683	775	340
235/40ZR18	95XL	W	8 1/2J	241	645	690	350
235/45ZR18	98XL	W	8J	236	669	750	340
235/50ZR18	101XL	W	8 1/2J	248	653	730	340
245/40ZR18	97XL	W	7 1/2J	245	693	825	340
235/55R18	104XL	V	7 1/2J	245	715	900	340
235/60R18	103	V	7J	240	739	875	300



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL

SAND

IT

FR

DE

ES

PT

GR

RU

UK

JP

B ZERO 121

SAND | TRL | LTR | RT | MT | AT | AS | HT | UHP | HP

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
245/45ZR18	100XL	W	8J	243	677	800	340
255/35ZR18	94XL	W	9J	260	635	670	340
255/55R18	109XL	V	8J	265	737	1030	340
255/50R18	106XL	V	8J	265	713	950	340
265/35ZR18	97XL	W	9 1/2J	271	643	730	340
265/60R18	110	H	8J	272	775	1060	300
215/35ZR19	85XL	W	7 1/2J	218	633	515	340
225/35ZR19	88XL	W	8J	230	641	560	340
225/40ZR19	93XL	W	8J	230	663	650	340
235/35ZR19	91XL	W	8 1/2J	241	647	615	340
235/50R19	103XL	V	7 1/2J	245	719	875	340
235/55R19	105XL	V	7 1/2J	245	741	925	340
245/35ZR19	93XL	W	8 1/2J	248	655	650	350
245/40ZR19	98XL	W	8 1/2J	248	679	750	340
245/50R19	105XL	V	7 1/2J	253	729	925	340
255/55R19	111XL	V	8J	265	763	1090	340
265/30ZR19	93XL	W	9 1/2J	271	643	650	340
275/40ZR19	105XL	W	9 1/2J	278	703	925	340
225/35ZR20	93XL	W	8J	230	666	650	350
235/30ZR20	88XL	W	8 1/2J	242	650	560	340
245/30ZR20	90XL	W	8 1/2J	248	656	600	340
245/35ZR20	95XL	W	8 1/2J	248	680	690	350
245/40ZR20	99XL	W	8 1/2J	248	704	775	340
255/35ZR20	97XL	Y	9J	260	686	730	350
255/35ZR20	102XL	Y	9J	260	686	850	350
265/50ZR20	111XL	W	8 1/2J	277	774	1090	340
315/35ZR20	110XL	W	11J	320	728	1060	340
265/45ZR21	104	W	9J	266	771	900	300
265/40ZR21	105XL	W	9 1/2J	271	745	925	340
295/35ZR21	107XL	W	10 1/2J	301	739	975	340
265/35ZR22	102XL	W	9 1/2J	271	745	850	350
275/40ZR22	107XL	W	9 1/2J	278	779	975	340
285/35ZR22	106XL	V	9 1/2J	285	815	1180	340
285/45R22	114XL	W	10J	290	759	950	340
295/30R24	105XL	V	10 1/2J	301	788	925	340
255/30ZR26	99XL	W	9J	260	814	775	340
275/25ZR26	98XL	W	10J	283	798	750	340
295/30ZR26	107XL	W	10 1/2J	301	838	975	340



Product features :

Outside strong blocks design enables the tyre to follow the road's surface contours more closely, helps to reduce block deformation while speed cornering, and enhances steering precision & better grip. Inside wide grooves ensures effective water dispersion. Sequential blocks design improves tread rib hardness, enhances braking performance. Wide straight grooves coupled with fine slots can effectively drain the water, damage the water film, shorten the braking distance and provide better wet control performance. Racing compound technology provides superior grip performance on wet road surfaces.



B ZERO 122

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
235/40ZR17	94XL	W	8 1/2J	241	620	670	340
245/40ZR17	95XL	W	8 1/2J	248	628	690	340
265/35ZR19	98XL	W	9J	260	661	710	340
275/35ZR19	100XL	W	9 1/2J	278	675	800	340
275/30ZR19	96XL	W	9 1/2J	278	649	710	340
245/45ZR20	103XL	W	8J	243	728	875	340
275/30ZR20	97XL	W	9 1/2J	278	674	730	340
275/35ZR20	102XL	W	9 1/2J	278	700	850	340
275/40ZR20	106XL	W	9 1/2J	278	728	950	340
285/30ZR20	99XL	W	10J	290	680	775	340



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL

SAND

IT





Product features :

The design with strengthening rib in inner of tire shoulder increases the rigidity of the pattern blocks, ensures better steerability of the tire.

The straight slots and blocks in the outer of the tread reduce the road noise and improve the grasp force when making a turn. The water modules with design of 3D drifting simulation provides better braking performance on wet/slippery road.

B ZERO 123 PRO

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
205/55R16	91	V	6 1/2J	214	632	615	300
205/60R16	92	H	6J	209	652	630	300
205/65R16	95	H	6J	209	672	690	300
215/45R16	90XL	V	7J	213	600	600	340
215/65R16	98	H	6 1/2J	221	686	750	300
215/60R17	96	H	6 1/2J	221	690	710	300
215/55R17	98XL	V	7J	226	668	750	340
225/60R17	99	H	6 1/2J	228	702	775	300
225/65R17	102	H	6 1/2J	228	724	850	300
215/50R18	92	V	7J	226	673	630	300
215/55R18	99XL	V	7J	226	693	775	340
225/55R18	102XL	V	7J	233	705	850	340
225/55R18	98	V	7J	233	705	750	300
225/60R18	100	V	6 1/2J	228	727	800	300
225/55R19	99	V	7J	233	731	775	300
235/45ZR18	98XL	W	8J	236	669	750	340
235/50R18	101XL	V	7 1/2J	245	693	825	340
225/45R19	96XL	W	7 1/2J	225	685	710	340
235/40R19	96XL	W	8 1/2J	241	671	710	340
235/50R19	103XL	V	7 1/2J	245	719	875	340
235/50R19	99	V	7 1/2J	245	719	775	300
235/60R19	107XL	H	7J	240	765	975	340
245/45R19	102XL	V	8J	243	703	850	340
245/55R19	107XL	V	7 1/2J	253	753	975	340

B ZERO 123 PRO

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
255/50R19	107XL	V	8J	265	739	975	340
235/45R20	100XL	W	8J	236	720	800	340
245/45R20	103XL	W	8J	243	728	875	340
245/50R20	102	V	7 1/2J	253	754	850	300
255/45ZR20	105XL	W	8 1/2J	255	738	925	340
255/55R20	110XL	V	8J	265	788	1060	340
275/45R20	110XL	W	9J	273	756	1060	340
255/45R21	105XL	W	8 1/2J	255	763	925	340
265/45R22	109XL	W	9J	266	797	1030	340
305/30R26	109XL	W	11J	313	844	1030	340
275/25R28	100XL	W	10J	283	849	800	340
295/25R28	103XL	W	10 1/2J	301	859	875	340
255/30R30	102XL	W	9J	260	916	850	340
265/30R30	105XL	W	9 1/2J	271	922	925	340
275/25R30	101XL	W	10J	283	900	825	340



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL

SAND




BERTONY



HT

Product features:

Four wide grooves design provide effective drainage and sufficient wet safety performance. The compact shoulder design provide excellent handling performance with low noise. Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance on wet land. Multiple blade groove pattern provide excellent grip and handling performance on wet land.



B ZERO 19



Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
225/70R16	103S			736		950	300
235/60R16							
235/70R16	106S			736		950	300
245/70R16	107S			750		975	300
215/65R17							
225/65R17	106H	8.5	6.5	724	228	950	
235/55R17	103V	7.9	7.5	690	245	875	
245/65R17	111H	8.5	7	750	248	1090	
225/60R18							
235/55R18	104V	7.9	7.5	715	245	900	
245/60R18							
265/65R18	114H	8.5	8	801	272	1180	



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL


SAND





Product features :

Closed Shoulder: Reduces noise by limiting air flow.
Multi-Sequencing: Minimizes tire noise for a quiet ride.
Enhanced Contact Patch: Promotes even wear and longer life.
Advanced Tread Compound: Improves wet grip for safer rain driving.



B ZERO 20




Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
215/60R17	96H	8	6.5	690	221	710	
225/60R17	99V	8	6.5	702	228	775	
225/65R17	102H	8	6.5	724	228	850	
235/65R17	108V XL	8	7	738	240	1000	
215/55R18	95V/99V XL	8	7	693	226	690/775	
225/55R18	98V/102V XL	8	7	705	233	750/850	
235/50ZR18	101W XL	8	7.5	693	245	825	
235/55R18	100V/104V XL	8	7.5	715	245	800/900	
235/60R18	107V XL	8	7	739	240	975	
235/55ZR19	105W XL	8	7.5	741	245	925	
245/55ZR19	107W XL	8	7.5	753	253	975	



Product features :

Four wide grooves design provide effective drainage and sufficient wet safety performance. The compact shoulder design provide excellent handling performance with low noise. Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance on wet land. Multiple blade groove pattern provide excellent grip and handling performance on wet land.

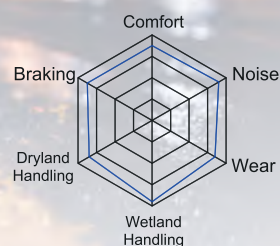

B ZERO 21



Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
265/70R17	115T	8.7	8J	804	272	1215	300
265/60R18	110H	8.2	8J	775	272	1060	300
285/50R20	116V XL	8.2	9J	794	297	1250	340



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL


SAND

23



Product features :

Cross-zigzag grooves improve wet and dry traction and braking.
Optimized center block enhances handling stability.
Interlocking tread blocks boost stiffness, grip, and wear resistance.
Reinforced sidewall improves passability on complex roads.



B ZERO 22



SIZE	LI / SS	TREAD (MM)	DEPTH STD RIM DIAMETER	OVERALL (MM)	SECTION WIDTH (MM)	MAX LOAD (KG)	INFLATED PRESSURE (KPA)250
265/70R16	112T	8	8J	778	272	1120	300
275/70R16	114T	8	8J	792	279	1180	300
265/65R17	112T	8	8J	776	272	1120	300
265/70R17	115T	8	8J	804	272	1215	300
265/60R18	110T	8	8J	775	272	1060	300
285/60R18	116T	8	8½J	799	292	1250	300
275/65R17	115T	8	8J	790	279	1215	300
285/65R17	116T	8	8½J	802	292	1250	300



HP

UHP

HT

AS

AT

MT

RT

LTR

TRL

SAND

25

25

25

25

25

25

25




SAND | TRL | LTR | RT | MT | AT | AS | HT | UHP | HP



Product features :

4 main grooves with through-type lateral grooves enhance wet grip and drainage. Reinforced tread blocks increase stiffness for better handling and stability under various driving conditions. Variable pitch and cross-designed sipes reduce vibration and noise, ensuring a quiet, comfortable ride.



B ZERO 26



Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
265/55R19	7.8		8.J5	775		1030	
265/55R20	7.8		8.J5	800		1150	



Product features :

The design with three lengthwise grooves and rigid shoulder blocks provides excellent dry/wet safety and steering performance.

The high-density 3D cutter slots pattern in the tread and shoulder area ensures excellent steering performance on snowy and icy roads.

The all-season tread formula ensures driving safety during summer and icy winter seasons.



B ZERO 141

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
195/70R15C 8PR	104/102	S	6J	201	655	900/850	450
215/70R15C 8PR	109/107	S	6 1/2J	221	683	1030/975	450
225/70R15C 8PR	112/110	S	6 1/2J	228	697	1120/1060	450
185/75R16C 8PR	104/102	S	5J	184	684	900/850	475
185/75R16C 10PR	107/105	S	5J	184	684	975/925	525
195/75R16C 8PR	107/105	S	5 1/2J	196	698	975/925	475
195/75R16C 10PR	110/108	S	5 1/2J	196	698	1060/1000	525
205/65R16C 8PR	107/105	T	6J	209	672	975/925	475
205/75R16C 8PR	113/111	S	5 1/2J	203	714	1150/1090	525
215/65R16C 8PR	109/107	T	6 1/2J	221	686	1030/975	475
225/65R16C 8PR	112/110	S	6 1/2J	228	698	1120/1060	475
225/75R16LT 10PR	121/120	R	6J	223	744	1450/1400	575
235/65R16C 8PR	115/113	S	7J	240	712	1215/1150	475



SAND | TRL | LTR | LTR | MT | RT | AT | AS | HT | UHP | HP






BEATON



Product features :

Aggressive all-terrain traction on and off-road.
Robust sidewall design.
Staggered shoulder blocks for greater maneuverability in soft soil. Advanced tread design for longer wear.



B ZERO 2



Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
235/60R15	98T	9.5	7J	663	240	750	250
215/65R16	96T	9.5	6.5J	686	221	710	250
LT235/70R16	110/107Q	11	7J	736	240	1060/975	450
LT245/70R16	118/115Q	11	7J	750	248	1320/1215	550
LT265/70R16	121/118S	11	8J	778	272	1450/1320	550
LT245/70R17	119/116R	11	7J	776	248	1360/1250	550
LT265/65R17	120/117S	11	8J	776	272	1400/1285	550
LT265/70R17	121/118S	11	8J	804	272	1450/1320	550
LT285/70R17	121/118S	11	8.5J	832	292		
LT315/70R17	121/118S	11	9.5J	874	323	1450/1320	550
LT265/60R18	119/116S	11	8J	775	272	1360/1250	550
LT265/70R18	124/121Q	11	8J	829	272	1600/1450	550
LT275/65R18	123/120S	11	8J	815	279	1550/1400	550
LT285/60R18	122/119S	11	8.5J	799	292	1500/1360	550
LT265/50R20	115/112S	11	8.5J	774	277		
LT275/55R20	120/117S	11	8.5J	810	284	1400/1285	550
LT275/50R22	119/116S	11	8.5J	835	284	1360/1250	550
LT285/45R22	116/113S	11	9.5J	815	285	1250/1150	550



SAND | TRL | LTR | RT | MT | AT | AS | HT | UHP | HP





Product features :

Strong and rigid pattern design provide strong and powerful grounding area with sturdily performance to resist the serious impact from road.

Special design with longitudinal and crosswise wide pattern grooves provide powerful traction force on muddy, snow and gravel condition. Supreme traction force and arduous crosscountry enriched your beautiful life.

The design with rectangular shoulder and wide tread has the wear-resistance formula to provide the excellent mileage of traveling.

The special design with impact-resistance in the shoulder and rigid tire sidewall improve the resistance performance on cutting, stripping and tearing.

B ZERO 151

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
LTR							
165R13C 8PR	94/93	Q	4.50B	165	594	670/650	450
175R13C 8PR	97/95	Q	5.00B	178	609	730/690	450
185R14C 8PR	102/100	Q	5.1/2J	188	650	850/800	450
195R14C 8PR	106/104	Q	5.1/2J	198	666	950/900	450
195R15C 8PR	106/104	Q	5.1/2J	198	690	950/900	450
205/65R15C 6PR	102/100	Q	6J	209	647	850/800	375
205/70R15C 8PR	106/104	Q	6J	209	669	950/900	450
LT235/70R16 8PR (OWL)	110/107	Q	7J	240	736	1060/975	450
LT245/70R16 8PR (OWL)	113/110	Q	7J	248	750	1150/1060	450
LT255/70R16 8PR (OWL)	115/112	Q	7 1/2J	260	764	1215/1120	450
LT245/70R17 10PR (OWL)	119/116	R	7J	248	776	1360/1250	550
LT265/65R17 10PR (OWL)	120/117	Q	8J	272	776	1400/1285	550
LT265/70R17 10PR (OWL)	121/118	Q	8J	272	804	1450/1320	550
LT275/65R17 10PR (OWL)	121/118	Q	8J	279	790	1450/1320	550
LT275/70R17 10PR (OWL)	121/118	Q	8J	279	818	1450/1320	550
LT285/65R17 10PR (OWL)	121/118	Q	8 1/2J	292	802	1450/1320	550
LT285/70R17 10PR (OWL)	126/123	Q	8 1/2 J	292	832	1700/1550	550
LT315/70R17 10PR (OWL)	126/123	Q	9 1/2J	323	874	1700/1550	450
LT255/60R18 10PR (OWL)	117/114	R	7 1/2J	260	763	1280/1180	550
LT265/65R18 10PR (OWL)	122/119	Q	8J	272	801	1500/1360	550
LT285/60R18 10PR (OWL)	122/119	Q	8 1/2J	292	799	1500/1360	550
33x12.50R20LT10PR (OWL)	119	R	10J	318	832	1360	550

B ZERO 151

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
PCR							
235/60R14	96	T	7J	240	638	710	250
P205/70R15	96	T	6J	209	669	710	300
225/50R15	91	T	7J	233	607	615	250
235/60R15	98	T	7J	240	663	750	250
P265/70R16	112	T	8J	272	778	1120	300
P265/60R18	114	H	8J	272	775	1180	340





Product features:

The design with wide tread width and excellent wear resistance recipe provide excellent service mileages and safe handling performance.

The special design wide lengthwise/crosswise grooves provide strong traction force, well fit the mud, snow and gravel road, which has excellent traction force to provide happy life in off-road conditions.

The design of shoulder lengthwise grooves coupled with crosswise pattern reduced the noise and provide excellent off-road performance.

The special crash-proof design in the tire shoulder and the strong side-wall improved the cutting-proof, peeling-proof and tearing-proof performance.

B ZERO 152


Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
LT245/65R17 8PR (OWL)	111/108	S	7J	248	750	1090/1000	450
LT255/65R18 10PR (OWL)	120/117	Q	7 1/2 J	260	789	1400/1285	550
LT235/55R19 10PR (OWL)	111/108	S	7 1/2 J	245	741	1090/1000	550
LT245/55R19 8PR (OWL)	110/107	S	7 1/2 J	253	753	1060/975	450
LT255/55R19 8PR (OWL)	111/108	S	8J	265	763	1090/1000	450
LT255/60R19 8PR (OWL)	113/110	Q	7 1/2 J	260	789	1150/1060	450
LT265/55R19 8PR (OWL)	113/110	Q	8 1/2 J	277	775	1150/1060	450
LT275/55R20 10PR (OWL)	120/117	S	8 1/2 J	284	810	1400/1285	550
LT275/60R20 10PR (OWL)	123/120	Q	8J	279	838	1550/1400	550
LT275/65R20 10PR (OWL)	126/123	S	8J	279	866	1700/1550	550
LT275/50R21 10PR (OWL)	118/115	S	8 1/2 J	284	809	1320/1215	550





Product features :

Improved grip and traction, sufficiently reduces braking distance under dry or wet.
Good ability to break water surface tension and reduces sliding on wet.
Great resistance to impact and load capability.
Low noise during driving.

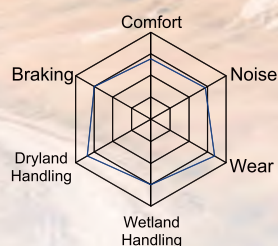

B ZERO 4



SIZE	LI / SS	TREAD (MM)	DEPTH STD RIM DIAMETER	OVERALL (MM)	SECTION WIDTH (MM)	MAX LOAD (KG)	INFLATED PRESSURE (KPA)250
255/70R15C 6PR	112/110S	8	7 ½J	739	260	1120/1060	375
255/70R15LT	112/110S	8	7 ½J	739	260	1120/1060	375
6PR 255/70R15C	113/110S	8	7 ½J	739	260	1150/1060	450
8PR 205R16C	110/108R	9.5	6J	736	208	1060/1000	450
8PR 205R16LT	110/108R	9.5	6J	736	208	1060/1000	450
8PR 265/70R16	112T	8	8J	778	272	1120	300
275/70R16	114T	8	8J	792	279	1180	300
225/70R17	108T XL	8	6 ½J	748	228	1000	340
265/65R17	112S	8.3	8J	776	272	1120	300
275/65R17	115T	8	8J	790	279	1215	300
265/70R17	115T	8	8J	804	272	1215	300
285/65R17	116T	8	8 ½J	802	292	1250	300
265/60R18	110H	8	8J	775	272	1060	300
285/60R18	116T	8	8 ½J	799	292	1250	300




SAND | TRL | LTR | RT | MT | AT | AS | HT | UHP | HP





Product features :

The use of straight longitudinal grooves improves the drainage of the tire, thereby improving the waterproof and drift performance. Super wear-resistant formula, providing excellent durability and wear resistance. Continuous shoulder design improves wear and tear resistance.

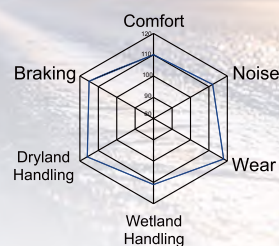

B ZERO 86



Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
195R14C WSW	106/104P	8.5	5½J	666	198	950/900	450
205R14C WSW	109/107N	8.5	6J	686	208	1030/975	450
205/70R15C WSW	106/104Q	8.5	6J	669	209	950/900	450
215/70R15C WSW	109/107R	8.5	6½J	683	221	1030/975	450
225/70R15C WSW	112/110R	8.5	6½J	697	228	1120/1060	450



SAND | TRL | LTR | RT | MT | AT | AS | HT | UHP | HP






SAND | TRL | LTR | RT | MT | AT | AS | HT | UHP | HP



Product features :

Rugged tread design ensures good traction and bite in rough conditions. Robust case construction offers extra protection against many hazards commonly encountered in severe off road conditions. Stronger cornering and excellent tread wear.

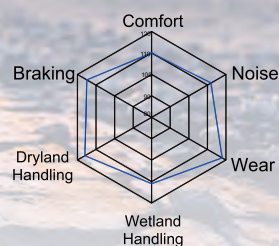

B ZERO 87




Size	LI/SS	Tread Depth (mm)	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (lbs)	Pressure (psi)
235/85R16LT	120/116S	6½J		806	235	1400/1250	550





Product features :

Good straight line stability and steering performance.
Great loading capability.
Good drainage and safty performance on wet road.
More quite driving experience.

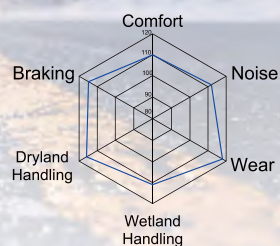

B ZERO 94



SIZE	LI / SS	TREAD (MM)	DEPTH STD RIM DIAMETER	OVERALL (MM)	SECTION WIDTH (MM)	MAX LOAD (KG)	INFLATED PRESSURE (KPA)250
7.50R16LT 8PR	114/112S	9.8	6.00G	805	215	1180/1120	475
7.50R16LT 10PR	116/111S	9.8	6.00G	805	215	1250/1090	560
225/95R16C 8PR	118/116Q	8.4	6J	834	223	1320/1250	450



SAND | TRL | LTR | RT | MT | AT | AS | HT | UHP | HP





Product features :

The extra-strong structure design ensures the excellent braking and steering capability, which adapts various complex road & weather conditions.

Design of extra-deep pattern grooves and outstanding tread compound improves the anti-abrasion capability, which effectively prolonged the service life of the tyre.

Excellent grip on dry and wet roads for safe ride with zigzagging pattern grooves, reasonably arranged fine patterns and robust pattern blocks.

B ZERO 171

Size	Load Index PR	Speed	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Pressure (kpa)
185R14C 8PR	102/100	Q	51/2J	188	652	850/800	450
195R14C 8PR	106/104	Q	51/2J	198	668	950/900	450
195R15C(LT) 8PR	106/104	S	51/2J	198	693	950/900	450

BERTONY

LTR



LTR



BERTON

TRL




TRL



Product features :

This tire features a tread pattern with wide grooves to prevent hydroplaning and provide excellent wet grip. The stable block design ensures confident dry handling, while the angled sipes offer reliable traction in rain and light snow. It is designed for a quiet, comfortable ride and improved fuel economy.

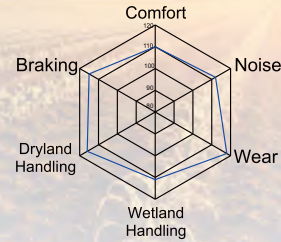

B ZERO 90



SIZE	LI / SS	TREAD (MM)	DEPTH STD RIM DIAMETER	OVERALL (MM)	SECTION WIDTH (MM)	MAX LOAD (KG)	INFLATED PRESSURE (KPA)250
145R10C	84/82N	6.2	4.00B	492	147	500/475	450
195/55R10C	98/96P	6.5	6.00B	468	201	750/710	625
155/70R12C	104/102N	6.0	4.50B	523	157	900/850	650
185/60R12C	104/101N	6.5	5½J	527	189	900/825	650
195/60R12C	104/102N	6.5	6J	536	201	900/850	650
195/60R12C	108/106N	6.5	6J	536	201	1000/950	650
225/55R12C 10PR	112N	6.5	7J	553	233	1120	690
135/80R13	74N	5.0	3.50B	546	133	375	340
145/70R13	79N	6.0	4.50B	534	150	437	340
145/80R13	79N	6.0	4.00B	562	145	437	340
155/70R13	79N	6.0	4.50B	548	157	437	340
155/80R13	79T	6.0	4.50B	578	157	437	300
155/80R13	84N	6.0	4.50B	578	157	500	340
165/70R13	84N	6.0	5.00B	562	170	500	340
165/80R13	84N	6.0	4.50B	594	165	500	340
175/70R13	86N	6.0	5.00B	576	177	530	340
185/70R13C	106/104N	6.5	5.50B	590	189	950/900	600
185/70R13C	108/106N	6.5	5.50B	590	189	1000/950	600
195/50R13C	104/101N	6.5	6.00B	526	201	900/825	650
185/65R14	93N	6.5	5½J	596	189	650	340
195/65R14	96N	6.5	6J	610	201	710	340
195/70R14	96N	6.5	6J	630	201	710	340
185/65R15	93N	6.5	5½J	621	189	650	340
195/65R15	95N	6.5	6J	635	201	690	340
195/65R15	98N	6.5	6J	635	201	750	340
125/80R17	71Q	8.0	3½J	632	126	345	300



SAND | TRL | LTR | RT | MT | AT | AS | HT | UHP | HP





Product features :

High load capacity for heavy-duty material handling.
Excellent stability and grip on industrial floors.
Durable compound for long life and resistance to cuts and wear.
Available in solid and pneumatic options for indoor and outdoor use

B ZERO 96



SIZE	TREAD (MM)	DEPTH STD RIM DIAMETER		MAX LOAD (KG)	INFLATED PRESSURE (KPA) 250
		SW	OD		
9.00-16 8PR	9.5	255	860	1360	310
9.00-17 8PR	9.5	265	886	1450	310



AZZURRI

**FORZA
ITALIA**

GRIP

STRADA

BERTONY
TYRE

PRESTAZIONE

WINTER



Touring Winter

TOUR

High Performance Winter

HP

Ultra High Performance Winter

UHP

SUV / Highway Terrain Winter

SUV/HT

AT/MT Winter (All Terrain / Mud Terrain Winter)

AT/MT

Light Truck Winter

LT

Nordic Ice Winter

NOR/ICE





 **B ZERO 301** TOUR



 **B ZERO 302** TOUR



 **B ZERO 303** TOUR



 **B ZERO 341** SUV/HT



 **B ZERO 371** LT



 **B ZERO 381** NOR/ICE



 **B ZERO 382** NOR/ICE





TOUR

HP

SUV/HT

UHP

AT/MT

NOR/ICE

LT

WINTER



PRODUCT FEATURES

The wide design and pattern with new 3D sawtooth style fine sipe greatly improved the grasp area of the tread and effectively increased the grasp force of the tire on ice and snow.

The special sipe design with single direction and V shape increased the drainage performance of water and ice, improved the brake and control performance in winter on snow.

The materials such as silica etc are added in the tread compound; it is low-temperature resistance and features excellent adhesion force on the ice/snow.

B ZERO 301

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
165/70R13	83XL	T	5.00B	170	562	487	340
175/70R13	82	T	5.00B	177	576	475	300
165/70R14	81	T	5.00B	170	588	462	300
175/70R14	84	T	5J	177	602	500	300
175/65R14	82	T	5J	177	584	475	300
185/60R14	82	T	5 1/2J	189	578	475	300
185/65R14	90XL	T	5 1/2J	189	596	600	340
185/70R14	88	T	5 1/2J	189	616	560	300
195/60R14	86	Q	6J	201	590	530	300
185/60R15	84	T	5 1/2J	189	603	500	300
185/65R15	88	T	5 1/2J	189	621	560	300
195/60R15	88	T	6J	201	615	560	300
195/65R15	91	T	6J	201	635	615	300
195/55R15	85	T	6J	201	595	515	300
205/65R15	94	T	6J	209	647	670	300
195/55R16	91 XL	H	6J	201	620	615	340
205/55R16	91	T	6 1/2J	214	632	615	300
215/55R16	97 XL	T	7J	226	642	730	340
205/60R16	96 XL	T	6J	209	652	710	340
215/60R16	95	T	6 1/2J	221	664	690	300
215/65R16	98	T	6 1/2J	221	686	750	300
225/55R16	99 XL	T	7J	233	654	775	340
225/60R16	102XL	T	6 1/2J	228	676	850	340
225/65R16	100	T	6 1/2J	228	698	800	300
215/45R17	91 XL	V	7J	213	626	615	340

B ZERO 301

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
215/50R17	95XL	H	6 1/2J	214	638	690	340
215/55R17	94	T	7J	226	668	670	300
225/50R17	98 XL	H	7J	233	658	750	340
225/45R17	94 XL	H	7 1/2J	225	634	670	340
225/55R17	101 XL	H	7J	233	680	825	340
225/65R17	102	T	6 1/2J	228	724	850	300
235/55R17	99	T	7 1/2J	245	690	775	300
235/45R17	97 XL	H	8J	236	644	730	340
225/40R18	92 XL	H	8J	230	637	630	340
225/45R18	95XL	H	7 1/2J	225	659	690	350
245/40R18	93	V	8 1/2J	248	653	650	300
245/45R18	100 XL	V	8J	243	677	800	340



TOUR

HP

UHP

SUV/HT

AT/MT

LT

NOR/ICE

WINTER

47

47



TOUR

HP

UHP

SUV/HT

AT/MT

LT

NOR/ICE

WINTER



48

PRODUCT FEATURES

Design with three longitudinal zigzag pattern grooves provides water drainage performance in wet road and excellent steer-ability on snow/ice road.

Design with big pattern block outside provides enough rigidity and excellent steer-ability.

Design with multiple crossed pattern inside enlarges snow holding capability and strength of snow column, and enhanced the grip capability.

The fine slots in the pattern reduced the hitting noise, the zigzag slots diffused the noise frequency, making the noise even in various frequency waves.



B ZERO 302

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
145/70R12	69	Q	4.50B	150	509	325	300
155/65R13	73	Q	4.50B	157	532	365	300
175/65R14	82	T	5J	177	584	475	300
185/65R14	90XL	T	5 1/2J	189	596	600	340
175/65R15	88XL	T	5J	177	609	560	340
185/55R15	82	T	6J	194	585	475	300
185/60R15	88XL	T	5 1/2J	189	603	560	340
185/65R15	92XL	T	5 1/2J	189	621	630	340
195/50R15	82	H	6J	201	577	475	300
195/65R15	95XL	T	6J	201	635	690	340
205/55R16	94XL	T	6 1/2J	214	632	670	340
205/60R16	96XL	T	6J	209	652	710	340
215/55R16	97XL	T	7J	226	642	730	340
215/60R16	99XL	T	6 1/2J	221	664	775	340
215/65R16	102XL	T	6 1/2J	221	686	850	340
225/70R16	103	T	6.5J	228	722	875	300
245/70R16	107	T	7J	248	750	975	300
215/55R17	98XL	T	7J	226	668	750	340
205/50R17	93XL	T	6 1/2 J	214	638	650	340
205/55R17	95XL	H	6 1/2 J	214	658	690	340
225/45R17	94XL	T	7 1/2J	225	634	670	340
225/50R17	98XL	T	7J	233	658	750	340
225/55R17	101XL	T	7J	233	680	825	340
225/60R17	103XL	T	6 1/2J	228	702	875	340
225/65R17	106XL	T	6 1/2J	228	724	950	340

B ZERO 302

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
235/65R17	108XL	T	7J	240	738	1000	340
245/65R17	107	T	7J	248	750	975	300
215/55R18	99XL	H	7J	226	693	775	340
225/55R18	102XL	T	7J	233	705	850	340
225/60R18	104XL	T	6 1/2 J	228	727	900	340
235/45R18	98XL	H	8J	236	669	750	340
235/50R18	101XL	V	7.5J	245	693	825	340
235/60R18	107XL	T	7J	240	739	975	340
235/65R18	110XL	T	7J	240	763	1060	340
245/45R18	100XL	T	8J	243	677	800	340
255/55R18	109XL	T	8J	265	737	1030	340
265/60R18	114XL	T	8J	272	775	1180	340
285/60R18	116	T	8 1/2J	292	799	1250	300
225/45R19	96XL	H	7.5J	225	685	710	340
225/55R19	99H	H	7J	233	731	775	300
235/35R19	91XL	V	8 1/2 J	241	647	615	340
235/40R19	96XL	V	8 1/2 J	241	671	710	340
235/50R19	103XL	V	7.5J	245	719	875	340
235/55R19	105XL	H	7 1/2 J	245	741	925	340
245/45R19	102XL	H	8J	243	703	850	340
245/55R19	107XL	H	7 1/2 J	253	753	975	340
255/40R19	100XL	V	9J	260	687	800	340
255/45R19	104XL	H	8 1/2 J	255	713	900	340
255/50R19	107XL	T	8J	265	739	975	340
235/45R20	100XL	H	8J	236	720	800	340



TOUR

HP

UHP

SUV/HT

AT/MT

LT

NOR/ICE

WINTER

49

49



PRODUCT FEATURES

The four longitudinal pattern grooves with zigzag design provide excellent handling performance in snow and ice road.

The big pattern blocks with mutual supporting ensured the stability of steering, and the widened ribs and the pattern blocks with center vertical design guaranteed the grasp force in the ice road in starting or braking.

The saw-teeth pattern grooves coupled with horizontal grooves arranged in different inclination angle, provide excellent handling performance in snow road.

The design with crossed center cutter grooves and fine grooves improves the effective result of on the side edge. The inclination direction of the cutter grooves and the block edge is same to effectively outlet the water film on the ice road.

B ZERO 303

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
175/70R13	82	T	500B	177	576	475	300
155/65R14	75	T	4 1/2J	157	558	387	300
175/70R14	84	T	5J	177	602	500	300
185/60R14	82	T	5 1/2J	189	578	475	300
185/70R14	88	T	5 1/2J	189	616	560	300
195/60R15	88	T	6J	201	615	560	300
215/65R15	96	H	6 1/2J	221	661	710	300
195/55R16	91XL	H	6J	201	620	615	340
205/45R16	87XL	H	7J	206	590	545	340
205/50R16	91XL	H	6 1/2J	214	612	615	340
225/60R16	102XL	H	6 1/2J	228	676	850	340
235/60R16	100	H	7J	240	688	800	300
205/65R16	95	H	6J	209	672	690	300
265/70R16	112	T	8J	272	778	1120	300
205/45R17	88XL	V	7J	206	616	560	340
215/45R17	91XL	V	7J	213	626	615	340
215/50R17	95XL	V	7J	226	648	690	340
215/60R17	96	H	6 1/2J	221	690	710	300
215/65R17	103XL	T	6 1/2J	221	712	875	340
235/60R17	102	H	7J	240	714	850	300
245/45R17	99XL	V	8J	243	652	775	340
225/45R18	95XL	V	7 1/2J	225	659	690	340
225/50R18	99XL	H	7J	233	683	775	340
235/40R18	95XL	V	8 1/2J	241	645	690	340
245/50R18	104XL	H	7 1/2J	253	703	900	340

B ZERO 303

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
225/40R19	93XL	V	8J	230	663	650	340
235/45R19	99XL	V	8J	236	695	775	340
245/40R19	98XL	V	8 1/2J	248	679	750	340
245/60R18	105	H	7J	248	751	925	300
255/60R19	113XL	T	7 1/2J	260	789	1150	340
265/55R19	109	H	8 1/2J	277	775	1030	300
255/35R19	96XL	V	9J	260	661	710	340
255/55R19	111XL	H	8J	265	763	1090	340
275/35R19	100XL	V	9 1/2J	278	675	800	340
275/40R19	105XL	V	9 1/2J	278	703	925	340
235/50R20	104XL	H	7 1/2J	245	744	900	340
235/55R20	105XL	V	7 1/2J	245	766	925	340
245/35R20	95XL	V	8 1/2J	248	680	690	340
245/40R20	99XL	V	8 1/2J	248	704	775	340
245/45R20	103XL	V	8J	243	728	875	340
245/50R20	102	H	7 1/2J	253	754	850	300
255/35R20	97XL	V	9J	260	686	730	340
255/40R20	101XL	V	9J	260	712	825	340
255/45R20	105XL	V	8 1/2J	255	738	925	340
255/55R20	110XL	H	8J	265	788	1060	340
255/50R20	109XL	H	8J	265	764	1030	340
275/35R20	102XL	V	9 1/2J	278	700	850	340
275/40R20	106XL	V	9 1/2J	278	728	950	340
275/45R20	110XL	H	9J	273	756	1060	340
275/50R20	113XL	H	8 1/2J	284	784	1150	340



TOUR

HP

UHP

SUV/HT

AT/MT

LT

NOR/ICE

WINTER

51

51

B ZERO 303

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
265/45R21	108XL	H	9J	266	771	1000	340
275/45R21	110XL	H	9J	273	781	1060	340



TOUR

HP

UHP

SUV/HT

AT/MT

LT

NOR/ICE

WINTER

52

52

52

52

52

52

52

52



PRODUCT FEATURES

The wide tire and new 3D saw tooth fine seam pattern design of the crown increase the grip area of the crown and effectively improve the ice and snow grip of the tire.

The unique single guide and V-shaped wide groove design increases the performance of water and snow drainage, and improves the braking and safe handling performance of snow driving in winter.

Silicon dioxide and other materials are added to the tread, which has low temperature resistance and excellent ice and snow adhesion.

The projected small sharp angle ensures the reliable contact of the tyre and the ground surface under low temperature, which also enhanced the grip capability.

The special design with directional pattern and various 3D steel sheets effectively enhanced the grasp capability on icy/snow pavement.

B ZERO 341

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
215/70R15	98	T	6.5J	221	683	750	300
235/75R15	105	Q	6 1/2J	235	733	925	300
215/70R16	100	Q	6 1/2J	221	708	800	300
235/70R16	106	Q	7J	240	736	950	300
215/60R17	96	T	6 1/2J	221	690	710	300
225/60R17	99	T	6.5J	228	702	775	300
235/65R17	104	T	7J	240	738	900	300
265/70R17	115	T	8J	272	804	1215	300
265/65R17	112	T	8J	272	776	1120	300
275/65R17	115	T	8J	279	790	1215	300
235/55R18	104 XL	T	7 1/2J	245	715	900	340
235/60R18	103	T	7J	240	739	875	300
275/65R18	116	T	8J	279	815	1250	300
275/55R20	117 XL	T	8 1/2J	284	810	1285	340
275/60R20	115	T	8J	279	838	1250	300



UHP | HP | TOUR

SUV/HT

NOR/ICE | LT | AT/MT

WINTER



PRODUCT FEATURES

The design of shoulder pattern with rectangular shape and integrated coupling style enhanced the load capability and stable steerability on icy/snow pavement.

The design with three lengthwise zigzag grooves provide better capability to outlet the water and snow, and it also improved the steerability in slippery condition.

The projected small sharp angle ensures the reliable contact of the tyre and the ground surface under low temperature, which also enhanced the grip capability.

The special design with directional pattern and various 3D steel sheets effectively enhanced the grasp capability on icy/snow pavement.



B ZERO 371

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
165R14C 8PR	97/95	Q	4 1/2J	167	622	730/690	450
175R14C 8PR	99/98	Q	5J	178	634	775/750	450
175/70R14C 8PR	99/95	Q	5J	177	602	775/690	450
175/75R14C 8PR	99/98	Q	5J	177	618	670/630	450
185R14C 8PR	102/100	Q	5 1/2J	189	652	900/850	450
195/70R15C8PR	104/102	R	6J	201	655	900/850	450
205/70R15C8PR	106/104	R	6J	209	669	950/900	450
215/70R15C8PR	109/107	R	6 1/2J	221	683	1030/975	450
225/70R15C8PR	112/110	R	6 1/2J	228	697	1120/1060	450
185/75R16C8PR	104/102	R	5J	184	684	900/850	475
195/75R16C8PR	107/105	R	5 1/2J	196	698	975/925	475
195/65R16C8PR	104/102	Q	6J	201	660	900/850	475
205/75R16C8PR	110/108	Q	5 1/2J	203	714	1060/1000	475
205/65R16C8PR	107/105	T	6J	209	672	975/975	475
215/65R16C8PR	109/107	R	6 1/2J	221	686	1030/975	475
215/75R16C8PR	113/111	R	6J	216	728	1150/1090	475
225/65R16C8PR	112/110	R	6.5J	228	698	1120/1060	475
235/65R16C8PR	115/113	R	7J	240	712	1215/1150	475
235/65R16C10PR	121/119	R	7J	240	712	1450/1360	575





PRODUCT FEATURES

The integrated pattern design in the center area improved the entire rigidity and the exact responding of driving, it also increased the grasp force on the road.

The special pattern design with 3D cutter grooves improved the stability of grasp performance on snow road.

The optimized arrangement of studs minimized the disturbing noise wave while increased the grasp force on ice road. It also improved the driving comfort for the driver.

B ZERO 381

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
195/60R15	92XL	T	6J	201	615	630	340
215/55R16	97XL	T	7J	226	642	730	340
215/70R16	100	T	6 1/2J	221	708	800	300
215/65R17	103XL	T	6 1/2J	221	712	875	340
235/45R17	97XL	T	8J	236	644	730	340
215/55R18	95	T	7J	226	693	690	300
235/50R18	101XL	T	7 1/2J	245	693	825	340
245/40R18	97XL	T	8 1/2J	248	653	730	340
225/55R18	102XL	T	7J	233	705	850	340
255/60R18	112XL	T	7 1/2J	260	763	1120	340
225/60R18	104XL	T	6 1/2J	228	727	900	340
255/45R19	104XL	T	8 1/2J	255	713	900	340
245/45R19	98	T	8J	243	703	750	300
255/50R19	103	T	8J	265	739	875	300
255/55R19	107	T	8J	265	763	975	300
255/40R20	101XL	T	9J	260	712	825	340
255/45R20	105XL	T	8 1/2J	255	738	925	340
265/50R20	111XL	T	8 1/2J	277	774	1090	340



TOUR | HP | UHP | SUV/HT | AT/MT | LT | NOR/ICE

WINTER



B ZERO 381

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
205/65R16C 8PR	107/105	Q	6J	209	672	975/925	475
225/65R16C 8PR	112/110	Q	61/2J	228	698	1120/1060	475
225/75R16C 10PR	118/114	Q	6J	223	744	1320/1250	525
235/65R16C 10PR	118/114	Q	7J	240	712	1320/1250	525



WINTER NOR/ICE LT AT/MT SUV/HT UHP HP TOUR



PRODUCT FEATURES



The optimized design arrangement of stud hole increases the grasp force on snow/icy road and reduced the noise, providing better steerability and traction force on snow/icy road.

The design with 3D grooves increased the contacting area with ice and snow and improved the grasp force. The pattern design with continuous pattern in the tire cap effectively increased the rigidity of the pattern, the slant fine and wave grooves ensures better stability of steerability.

The design with directional V-Shape grooves enhances the flowing of water and snow in the grooves, which can effectively drainage the snow and water and provides better traction and grasp force in the snow/icy road.

B ZERO 382

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
175/70R13	82	T	500B	576	177	475	300
175/65R14	86 XL	T	5J	584	177	530	340
185/65R14	90 XL	T	51/2J	596	189	600	340
185/70R14	92 XL	T	51/2J	616	189	630	340
185/55R15	86T XL	T	6J	585	194	530	340
185/60R15	88 XL	T	51/2J	603	189	560	340
185/65R15	92 XL	T	51/2J	621	189	630	340
195/65R15	95 XL	T	6J	635	201	690	340
205/65R15	99 XL	T	6J	647	209	775	340
195/55R16	91T XL	T	6J	620	201	615	340
205/55R16	94 XL	T	61/2J	632	214	670	340
205/60R16	96 XL	T	6J	652	209	710	340
215/60R16	99 XL	T	61/2J	664	221	775	340
225/45R17	94XL	T	71/2J	634	225	670	340
205/50R17	93T XL	T	61/2J	638	214	650	340
215/50R17	95TXL	T	7J	648	226	690	340
225/50R17	98 XL	T	7J	658	233	750	340
215/55R17	98XL	T	7J	668	226	750	340
225/55R17	101 XL	T	7J	680	233	825	340
235/55R17	99T	T	71/2J	690	245	775	300
225/40R18	92T XL	T	8J	637	230	630	340
225/45R18	95T XL	T	71/2J	659	225	690	340
235/55R18	104T XL	T	71/2J	715	245	900	340
245/45R18	100T XL	T	8J	677	243	800	340
235/55R19	105 XL	T	7.5J	741	245	925	340



TOUR

HP

UHP

SUV/HT

AT/MT

LT

NOR/ICE

WINTER





B ZERO 382

Size	Load Index / PR	Speed	Standard Rim	Inflatable Section Width (mm)	Inflatable Overall Diameter (mm)	Loading Capacity (single/dual)(kg)	Inflation Pressure(kPa)
215/65R16	102 XL	T	61/2J	221	686	850	340
265/70R16	112	T	8J	272	778	1120	300
215/60R17	100 XL	T	61/2J	221	690	800	340
225/60R17	103 XL	T	61/2J	228	701	875	340
225/65R17	106 XL	T	61/2J	228	724	950	340
235/65R17	108 XL	T	7J	240	738	1000	340
265/65R17	116XL	T	8J	272	776	1250	340
235/45R18	98XL	T	8J	236	669	750	340
235/60R18	107 XL	T	7J	240	739	975	340
265/60R18	114XL	T	8J	272	775	1180	340
285/60R18	116	T	81/2J	292	799	1250	300
LT275/70R18 10PR	125/122	Q	8J	279	843	1650/1500	550
LT275/65R18 10PR	123/120	Q	8.0	279	815	1550/1400	550

BERTONY



RENTAL
KART TYRE

B ZERO921

RACING
KART TYRE

B ZERO 959

RENTAL
KART TYRE

B ZERO 926





RENTAL B ZERO 921 KART TYRE

SIZE	PLY	TT/TL	TT/TL	SW (MM)	OD (MM)	PSI
10X4.50-5	4	TL	4.50	129	250	14
11X3.60-5	4	TT	2.15	88	277	50
11X6.00-5	4	TL	5.00	149	279	50
11X7.10-5	4	TL	6.70	195	270	14
12X4.00-5	4	TT	2.15	96	301	50
16X6.50-8	4	TL	5.00	159	422	45
10X3.60-5	4	TL	4.20	115	258	14
10X4.50-5	4	TL	4.70	136	253	14
11X6.00-5	4	TL	6.50	184	265	14
11X7.10-5	4	TL	8.00	205	268	14

KEY FEATURES

- ✓ High mileage compound for extended life
- ✓ Consistent performance lap after lap
- ✓ Optimized for rental karting and high usage
- ✓ Excellent balance of grip and durability



HIGH GRIP



DURABLE



RENTAL
USE



SMOOTH
SURFACE



STABLE
HANDLING



LONG LIFE
COMPOUND





DIRECTION TREAD



RENTAL B ZERO 926 KART TYRE

SIZE	PLY	TT/TL	TREAD DEPTH (MM)	RIM WIDTH (IN)	SW (MM)	OD (MM)	PSI
10X4.50-5	4	TL	5.3	4.70	140	265	14
11X7.10-5	4	TL	5.3	6.70	190	280	14



RAIN USE



FAST WARM-UP



SOFT COMPOUND



WET GRIP



WATER EVACUATION



STABLE HANDLING

SUPERIOR WET PERFORMANCE

Engineered with an advanced directional tread pattern, this tyre rapidly evacuates water from the contact patch reducing hydroplaning risk and maintaining maximum grip on wet circuits.

CONFIDENT CORNERING

The specially formulated compound delivers predictable handling and excellent lateral grip, allowing drivers to attack corners with confidence even in heavy rain conditions.

FAST WARM-UP

Designed to reach optimal operating temperature quickly, ensuring consistent performance from the first lap in cool and wet environments.

RELIABLE CONTROL

Balanced construction provides stable braking, responsive steering feedback, and enhanced traction during acceleration on slippery surfaces.

KEY FEATURES

- ✓ Directional tread for rapid water drainage
- ✓ Strong wet braking and cornering grip
- ✓ Quick warm-up in cool and rainy sessions
- ✓ Reliable control with balanced performance



BERTONY

RACING /// ***SERIES***

ENGINEERED TO WIN

BUILT FOR SPEED
DRIVEN BY PERFORMANCE



**MAXIMUM
GRIP**



**PRECISE
HANDLING**



**RACE
PROVEN**



**ULTIMATE
PERFORMANCE**

RACING III



RACING III B ZERO 959

SIZE	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER
11*7.1-5	8.0	196	279
10*4.60-5	4.5	126	254

Precision Handling

A low-rolling-resistance curved sidewall combined with a high-strength internal structure minimizes carcass deformation during cornering, ensuring direct steering feedback and linear response. Every turn hits the apex with pinpoint accuracy and stability.

Ultimate Grip

High-traction synthetic rubber compound paired with fine straight-groove tread design provides outstanding dry-surface grip and cornering limits. Ultra-narrow groove width maximizes contact area, keeping the kart firmly biting the track even at high speeds.

Explosive Acceleration

Wider rear tyres and a high-grip tread work together to unleash corner-exit bursts, translating every ounce of power into fierce, responsive acceleration.

High Temperature Stability

Built with a high-temperature reinforced layer, the tyre maintains consistent grip under prolonged heat conditions, effectively preventing performance drop-offs and sustaining peak output throughout the race.



PRECISION HANDLING



ULTIMATE GRIP



EXPLOSIVE ACCELERATION





HIGH TEMPERATURE STABILITY



SMOOTH DRY TRACK



FAST RESPONSE

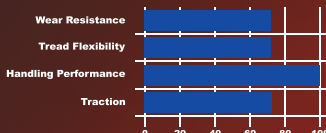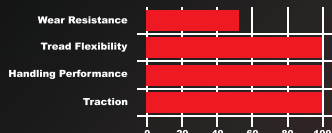





BERTONY

 Engineered in Italy



www.bertony.com

BERTONY L.L.C-FZ
+971 4 266 53 98